

KPC-LP751

Weather Proof LPR (License Plate Recognition) Camera




• Features

1/3"960H SONY EXview HAD CCD II
 Ultra-High Resolution of 700TVL (Only B/W)
 Plate capture up to 75mph (120Km/H)
 10 units High Power LED
 f=5.0~50.0mm DC Varifocal Lens
 Convenient OSD with Joystick
 External Zoom & Focus Adjustable
 Second Video Connector / Cable Concealed Bracket
 Outstanding Durability with IP67

• Dimensions

(Unit : mm)

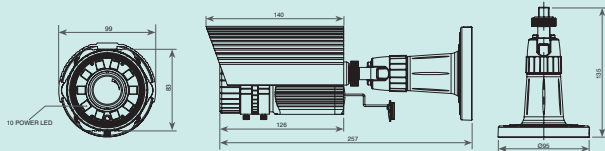

• Specifications

Model Name		KPC-LP751
Image Device	1/3"960H SONY EXview HAD CCD II	
Scanning System	2 : 1 Interlace	
Scanning Frequency	NTSC: 15.734 KHz(H), 59.94 Hz(V) / PAL: 15.625 KHz(H), 50 Hz(V)	
H. Resolution	700 TVL (Only B/W)	
Total Pixels	NTSC : 1020(H) x 508(V) / PAL : 1020(H) x 596(V)	
Effective Pixels	NTSC : 976(H) x 494(V) / PAL : 976(H) x 582(V)	
S/N Ratio	More than 50dB	
Min. Illumination	0 Lux (IR LED On)	
Sync. System	Internal	
Video Output	1.0 Vp-p Composite (75Ω)	
Lens	f=5.0~50.0mm DC Varifocal Lens	
Negative Image	On / Off	
Shutter Speed	1 / 3,000 sec (Speed Adjustable)	
Function	Focus Adjust	
OSD	Built-in with Joystick	
IR LED	850 nm, High Power LED 10 ea	
IP Rating	IP67 (Water Proof)	
Operating Temperature	14°F~122°F (-10°C~+50°C) / Heater On : -40°F~122°F (-40°C~+50°C)	
Storage Temperature	-4°F~140°F (-20°C~+60°C)	
Humidity	Less than 80%	
Power Consumption	DC12V	DC12V (±10%) Max. 850 mA
	Dual	DC12V (±10%) Max. 850 mA (with Heater: Max. 1.1 A) AC24V (±10%) Max. 10 W (with Heater: Max. 21 W)
Dimension (mm)	99(W) x 83(H) x 126(D)	
Weight	Approx. 1.37 kg	